

FRAMED SLIDING SYSTEM FOR BALCONIES, LOGGIAS OR TERRACES GLAZING

Framed sliding aluminium profile construction is designed for balconies, loggias, terraces or arbors glazing. Glazing will prevent inside room from rain, wind, noise and will give additional heat insulation. This system can be used in such places where it is no room for opening doors or windows and necessary to use constructions which can save space and have wide opening. Framed glazing system can be designed with fixed parts on top or on the sides, so it will be possible to make construction bigger on height and length. In this way, the range of use the constructions is becoming even wider. Constructions are very reliable and price is optimal.




This framed sliding aluminium profile system is very simple, but everything is designed with care, rubbers and brushes protects inside from water, wind and noise.



Glass:

Construction can be produced with clear, darkened, frosted, ornament or other glass, which can be tempered or not. Glass thickness can be 4 or 5 mm.

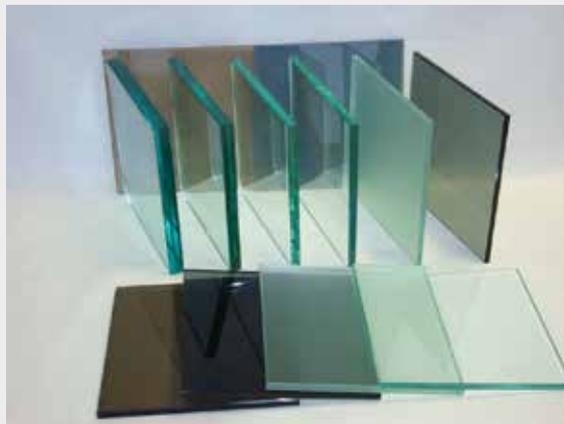

Aluminium profiles and other production in the system:

Aluminium profiles are painted in powder way.

It is possible to paint profiles in every color in RAL color chart. Construction can be 2, 3 or 4 rails. Rail amount is chosen depending on needed construction length. If there is „U“ shaped balcony, it is possible to offer fixed or one way opened windows in side parts of the balcony. Corners are joined by using special corner profiles, which can be rectangular or rounded. Corner can be fixed 90 degrees or adjustable.



Accessories:

Wheels, are produced from metal bearings, which are covered with plastics. Wheels are long lasting and gives construction smooth sliding without big noise. Special frame configuration protects wheels from fast wearing.



Watertightness:

Construction is produced with rubber sealings and brushes, it makes construction watertight.



Drainage:

Water from bottom rail is going out through drainage holes.

Safety and care:

System is locked with standard lockings or two sided handles with keys. To clean sliding sashes is possible by taking them out of the frame. This provides convenience and security.

Konstruktijos rėmas

Varčių slydimo kreipiančiosios

Varčios apsauga nuo iškritimo

Varčios rėmas

Stiklas

Sandarinimo šepetėlis



Production and mounting:

We consult our clients and answer to all technical questions.
We are committed to visit clients in their homes if it is necessary to check all mounting details.

Warranties:

- good prices, because we produce this system by ourselves;
- short production terms;
- mounting and service in all Lithuania;
- export of the systems all over the world;
- warranty 5 years;

Certificates:

CE mark certification for sliding framed constructions;
ISO 9001:2015 quality management certificate;
Aluminium profile supplier „Declaration of performance“ which note that the aluminium profile meets STR 1.01.05:2007 requirements;

Contacts:

Kaunas

V. Krėvės street. 53 - 205, Kaunas
Tel./faks.: +370 (37) 710 539 ; Fax +370 (37) 478192
Mob. +370 (676) 36 250
Email: info@intornas.lt

Vilnius

Laisvės pr. 117A
Tel./faks.: +370 (5) 2464 329
Mob. +370 (677) 85 177
Email: vilnius@intornas.lt

